

Lock data sheet „alternating use“

KEMMLIT select mechanical number combination lock



LOCK FUNCTION

- Alternating use | Lock can be operated with alternating PIN codes | For public deposit box lockers

LOCK DATA



KEMMLIT select mechanical combination lock

- ✓ with 10.000 programmable user codes
- ✓ Service cylinder for emergency opening or resetting
- ✓ QUICK-RESET for efficient locker administration
- ✓ ANTI-SPY-technique to protect personal user codes
- ✓ Automatic code wipe function for more comfort and safety
- ✓ Adjustable turn mode right/left
- ✓ Case made of glass fibre reinforced and easy to clean special plastic
- ✓ Retrofit for most doors with standard 16 x 19 mm holes possible

Operating instructions

KEMMLIT select mechanical number combination lock



LOCK FUNCTION

- Alternating use | Lock can be operated with alternating PIN codes | For public deposit box lockers

IMPORTANT NOTES FOR ADMINISTRATORS



KEMMLIT select mechanical combination lock „alternating use“

- ✓ Lock can be opened at any time with a service key
- ✓ The code will be deleted every time the lock is opened

ALTERNATING USE

QUICK-RESET/EMERGENCY RELEASE



Insert service key and
turn 90° to the left



Open lock

Lock data sheet


KEMMLIT select mechanical number combination lock



LOCK FUNCTION

- Alternating use | Lock can be operated with alternating PIN codes | For public deposit box lockers

IMPORTANT NOTES FOR THE USER

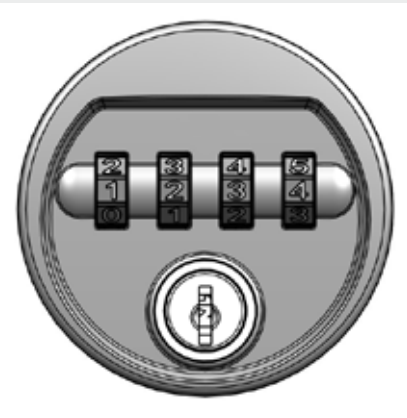

KEMMLIT select mechanical combination lock "alternating use"

- ✓ The lock is in encoding mode if opened with number series in vertical position
- ✓ The code shown/entered in vertical position is automatically saved and wiped once the lock is closed
- ✓ Close the lock only once you have either memorised or written down the code
- ✓ Do not choose 0-0-0-0 as a personal code
- ✓ Your personal code will be deleted with every opening of the lock
- ✓ Please leave your locker with the lock in opened position with vertical number series if unused

Operating instructions

KEMMLIT select mechanical number combination lock



OPERATING INSTRUCTIONS FOR THE LOCKER USER

ALTERNATING USE

ENCODE AND LOCK



Enter personal code
while in vertical position

1 2 3 4




Turn lock horizontally
as far as possible
(code will be wiped)

OPEN LOCK



Enter personal
code

1 2 3 4



Turn lock vertically
as far as possible
(code will be deleted)